



METALLIC LOOK

FLOOR | WALL

GEOMETRIC FUSION™

COLORBODY™ PORCELAIN



 **daltile**
IMAGINE WHAT'S POSSIBLE™

FLOOR | WALL

GEOMETRIC FUSION™

COLORBODY™ PORCELAIN

Geometry, Deconstructed

Welcome the glamorous world of metallics with Geometric Fusion™. This chic collection offers nine patterns designed to be installed randomly, which creates an intentional deconstructed geometric look. Each tile features a decorative blend of metallic, matte and glossy finishes enhanced by EverLux Sync technology. Geometric Fusion's four popular metallic colors are perfect for adding excitement to a monochromatic space.

• DAZZLING METALLICS

- Features a geometric blend of metallic, matte and glossy finishes synchronized through EverLux™ Sync technology with subtle textures
- Stunning black and brilliant white designs as well as metallic bronze and silver hues

• STYLISH INSTALLATION

- Offered in nine 8 x 8 geometric patterns, this ColorBody™ porcelain tile is designed to be installed on floors and walls in a random, non-contiguous arrangement
- Boldly delivers visual interest to minimalistic, monochromatic spaces
- TruEdge™ delivers a seamless installation with smaller grout joints

METALLIC LOOK

USAGE



FLOOR



WALL



COUNTERTOP



SHOWER FLOOR



EXTERIOR FLOOR



STEPWISE™



TRU-EDGE™



MADE IN THE U.S.A.



LARGE FORMAT



MOSAIC/DECO



ENCAUSTIC



TERRAZZO



PAVER



CUSTOMIZE



FLEXFIT™



PC
COLORBODY PORCELAIN

LOW HIGH

SEE CHARTS FOR FULL PRODUCT DETAILS

SPECIAL FEATURES

Cover and above photos feature Geometric Fusion™ Graphite 8 x 8 on the wall.

METALLIC LOOK

FLOOR | WALL
GEOMETRIC FUSION™
COLORBODY™ PORCELAIN

SIZES:


8 x 8
Floor Tile

FINISHES: MATTE | GLOSSY

FLOOR TILE



PEARL GF01

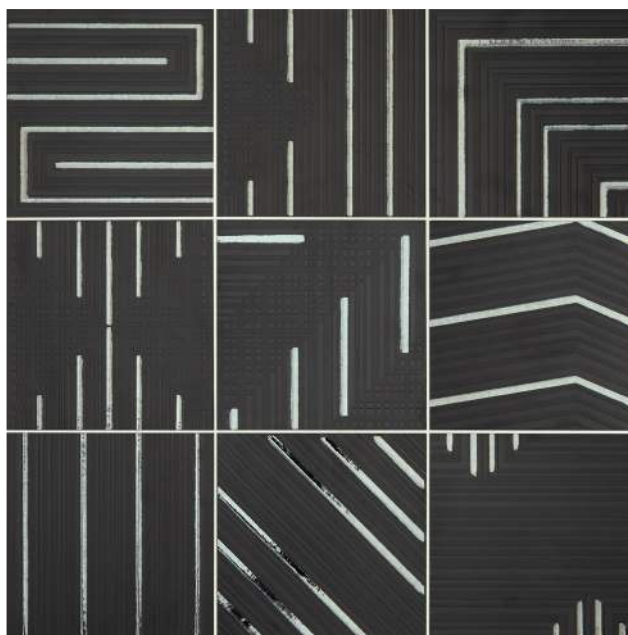

OBSDIAN GF02



AMBER GF04



GRAPHITE GF03



SLIP RESISTANT



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT*
*Applicable to products with Matte and Textured Finishes



FIRE-RESISTANT*
*Not Applicable to Mesh-Mounted Mosaics



CLIMATEPRO™



SIMPLICLEAN™

VISIT THE WHY TILE PAGE AT WWW.DAL TILE.COM FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	8 x 8 Floor Tile	(7-3/4" x 7-3/4") (19.65 cm x 19.65 cm)	3/8"	N/A	9

Product is available only in pre-boxed sets of nine patterns. Individual patterns are not sold separately.

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltille.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.

INSTALLATION

Grout Joint Recommendation	Shade Variation
Floor: 1/8"	 Medium (V2)

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltille.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance			
1	Residential Bathrooms	③	All Residential / Light Commercial
2	All Residential Areas	4	All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltille.com/Factors.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

 PRE-CONSUMER
RECYCLED MATERIALS

All or select items within this series meet the requirements for these qualifications. For more information, visit daltille.com.