



STONE LOOK

SAND AND STONE™

COLORBODY™ PORCELAIN WITH REVEALSNC3D™ TECHNOLOGY



 daltile®
IMAGINE WHAT'S POSSIBLE™

SAND AND STONE™

COLORBODY™ PORCELAIN WITH REVEALSNC3D™ TECHNOLOGY

Experience the inviting blend of Sand and Stone, where the artistic heritage of natural terrazzo meets the durability of porcelain tile. This stunning series marries the traditional large marble look chips with a softer, understated stone look. Seamlessly integrate the two styles or choose the visual that resonates with you. Available in three versatile sizes, and a neutral palette offered in matte and satin finish, Sand and Stone delivers an abundance of options to explore.

STONE LOOK

USAGE



SPECIAL FEATURES

NOT APPLICABLE
FOR ALL PRODUCTS
IN THIS SERIES. SEE
CHARTS FOR FULL
PRODUCT DETAILS.



Cover photo features Summit Stone design, 24 x 24 on the floor.

Above photo features Sand and Stone™ Basin Sand design, 12 x 24 on the floor and ONE Quartz Surfaces® Monument White on the counter.

SIZES:



24 x 48
Floor Tile



24 x 24
Floor Tile



12 x 24
Floor Tile

COLOR PALETTE

FINISHES: MATTE | SATIN



SUMMIT
SS70



BASIN
SS71



TUNDRA
SS72



DUNE
SS73

SAND DESIGN



SUMMIT SS70



BASIN SS71




TUNDRA SS72



DUNE SS73

STONE DESIGN

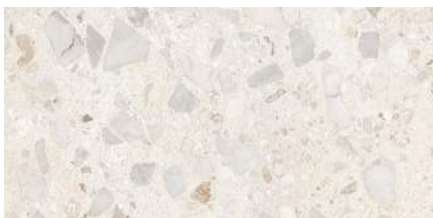


SUMMIT SS70



BASIN SS71



TUNDRA SS72

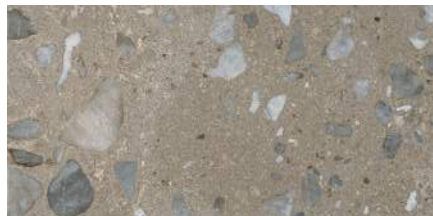

DUNE SS73



SLIP RESISTANT



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT*



FIRE-RESISTANT



CLIMATEPRO™



SIMPLICLEAN™

SAND AND STONE™

COLORBODY™ PORCELAIN WITH REVEALSNC3D™ TECHNOLOGY

STONE LOOK

SIZES

			Thickness	Finish
	24 x 48 Floor Tile*	(23-9/16" X 47-5/16") (60.00 cm X 120.30 cm)	5/16"	M S
	24 x 24 Floor Tile	(23-9/16" x 23-9/16") (60.00 cm x 60.00 cm)	5/16"	M
	12 x 24 Floor Tile	(11-3/4" x 23-9/16") (29.85 cm x 60.00 cm)	5/16"	M

M Matte Finish **S** Satin Finish in STONE DESIGN only.

*RevealSync3D is available in satin finish only.

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbf
Scratch Hardness	C1895	8.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at:
daltile.com/information/TestResults.

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓*
Shower Floors – Standard Center Drain	≥ 0.42	
Shower Floors – Linear Drain	≥ 0.42 (Mosaic) ≥ 0.60 (Floor)	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

* Matte Finish only.

TRIM

	Type	Number	Size	Finish
	Bullnose	S43F9	3 x 24	M
	Cover Base	S36C9	6 x 12	M
	Cover Base Outcorner	SC36C9	1 x 6	M

M Matte Finish

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8" (3/16" when multiple sizes are installed in a modular pattern, and/or when installing tile with a length 15" or greater in a staggered brick-joint pattern, overlap should not exceed 33%.)	 High (V3)

DURABILITY

Floor Surface Wear Resistance

1	Residential Bathrooms	3	All Residential / Light Commercial
2	All Residential Areas	④	All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltile.com/LargeTiles for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex TRIM modified thin-set is recommended for installation.



All or select items within this series meet the requirements for these qualifications. For more information, visit daltile.com.



7834 C.F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of
Daltile® products and information,
visit our website at daltile.com.

